



701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

HPW2E SERIES TWO WIDE PROOF BOX

HOBART

STANDARD FEATURES

- Eye-level digital control panel mounted for easy access
 - Set heat/humidity system
 - Four individual rack timers
- Easy access proofing system
 - Internally mounted
 - Energy efficient
 - No flushing required
- Patented air flow system
- Modular panel construction
- Cam lock attachment
- Stainless steel interior and exterior
- No ramp required

OPTIONS

- ☐ Stainless steel floor
- ☐ Pass thru

ACCESSORIES

- ☐ Upper side trim
 - ☐ One side
 - ☐ Both sides
- ☐ Interior light

MODEL CONFIGURATIONS

- ☐ **40.5" Deep Cabinet Two Door** – (may be shipped assembled) Two Single End or Three Single Side Load Racks or One Double Rack
- ☐ **60.5" Deep Cabinet Two Door** – Four Single End or Five Single Side Load Racks or Two Double Racks
- ☐ **80.5" Deep Cabinet Two Door** – Five Single End or Six Single Side Load Racks or Two Double Racks
- ☐ **100.5" Deep Cabinet Two Door** – Six Single End or Eight Single Side Load Racks or Three Double Racks
- ☐ **120.5" Deep Cabinet Two Door** – Eight Single End or Ten Single Side Load Racks or Three Double Racks

Specifications, Details and Dimensions on Inside and Back.




HPW2E SERIES TWO WIDE PROOF BOX


HPW2E SERIES TWO WIDE PROOF BOX




701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

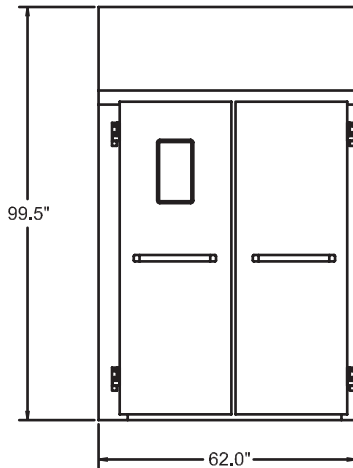


**HPW2E Series
Front View**

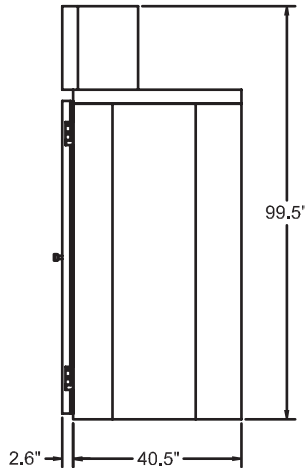


**40.5" Deep Cabinet
Side View**

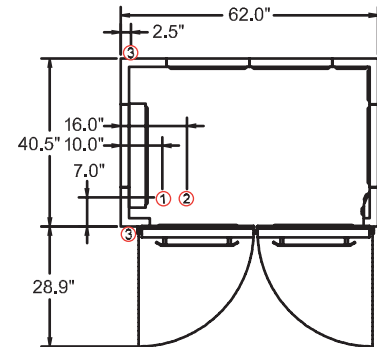


**40.5" Deep Cabinet
Plan View**

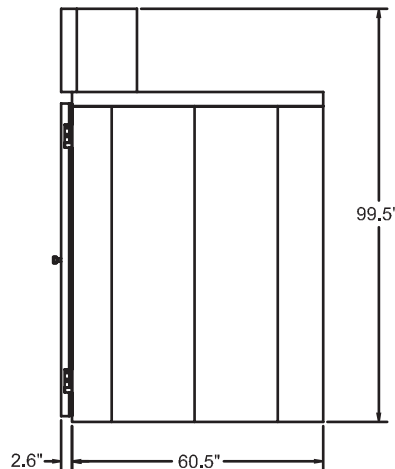


**60.5" Deep Cabinet
Side View**

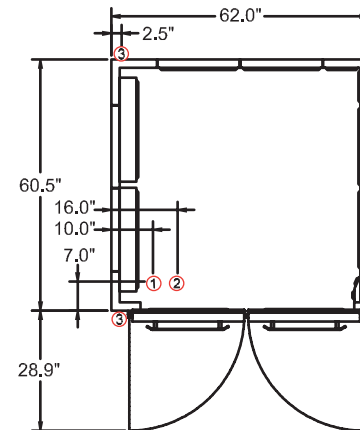

**60.5" Deep Cabinet
Plan View**

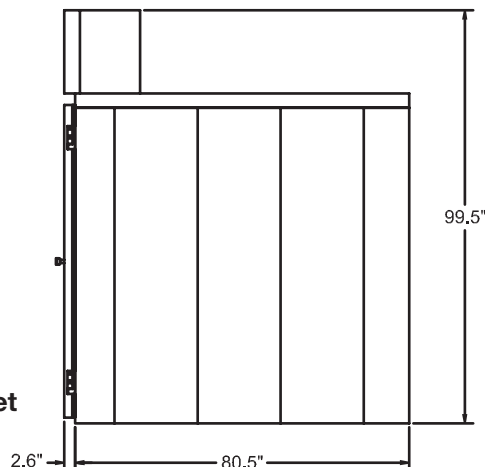

**80.5" Deep Cabinet
Side View**

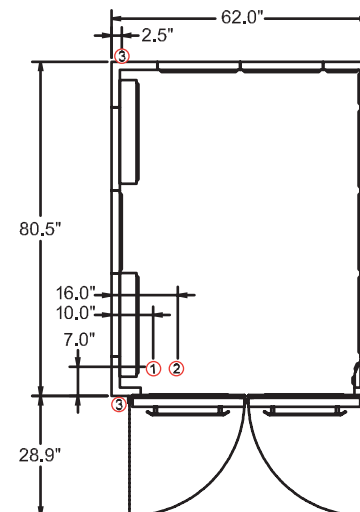


**80.5" Deep Cabinet
Plan View**

① Water Supply 85" AFF ② Electrical Supply 85" AFF ③ Drain 5" AFF Front or Rear




701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com


HPW2E SERIES TWO WIDE PROOF BOX

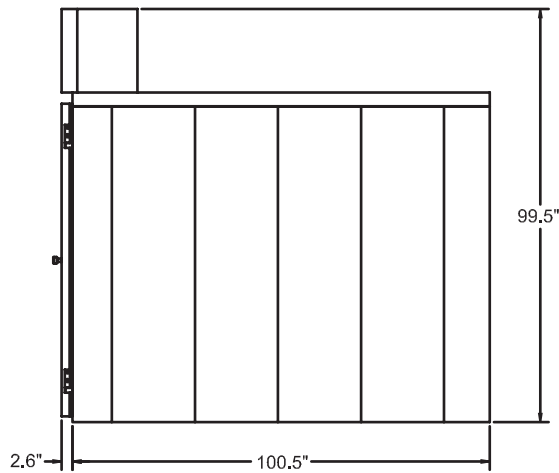


**100.5" Deep Cabinet
Side View**

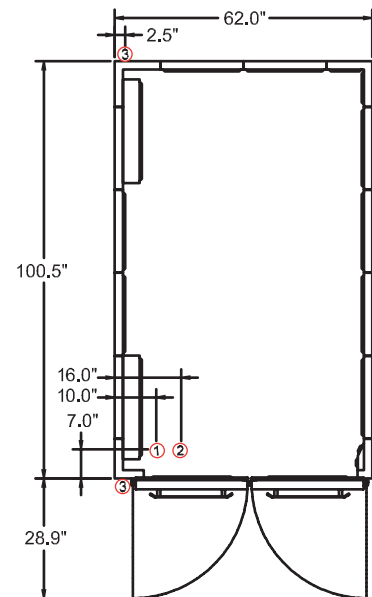

**100.5" Deep Cabinet
Plan View**

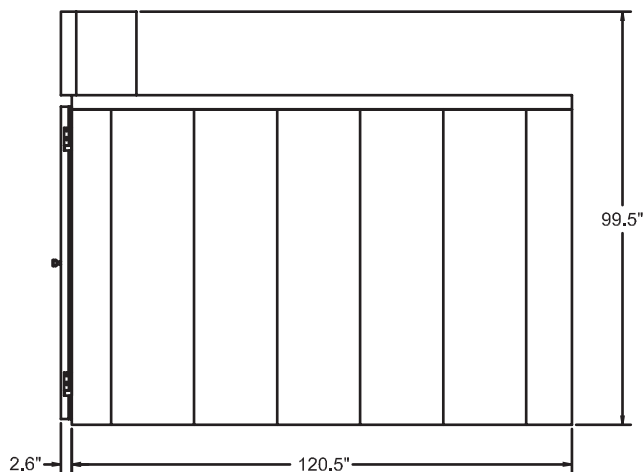

**120.5" Deep Cabinet
Side View**

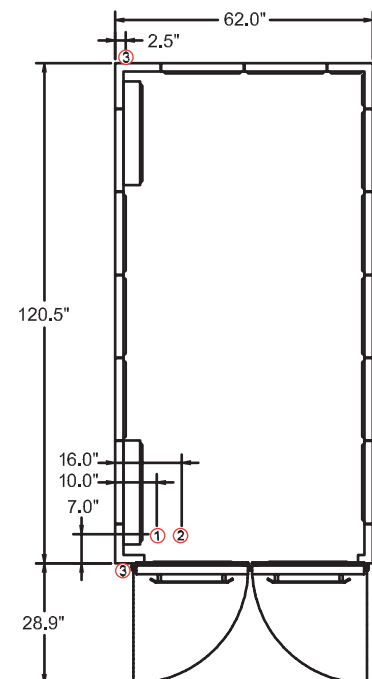

**120.5" Deep Cabinet
Plan View**

① Water Supply 85" AFF ② Electrical Supply 85" AFF ③ Drain 5" AFF Front or Rear

HPW2E SERIES TWO WIDE PROOF BOX



701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

SPECIFICATIONS

GENERAL:

- Water** – ½" FNPT. Cold water @ 30-80 psi. Water supply must have the proper hardness, pH and chloride concentration. The recommended water hardness range is 2-4 grains per gallon. The recommended pH range is 7.0 to 8.0. The acceptable range for chloride concentration is 0-30 ppm. Consult your local Hobart service office, water company and/or water conditioner dealer before installation.
- Power** – See chart below for specific power requirements. Neutral wire circuitry needed to provide 110-120V for control components. A separate line may be run or a transformer will be required if 110-120V is not available. Consult factory for 110-120V requirements.
- Drain** – ½" FNPT. Route to air-gap drain.

CONSTRUCTION: Stainless steel interior and exterior is standard. The interior perimeter is supplied with bumpers on all sides to protect the finish.

CONTROLS: Eye-level digital controls for precise heat and humidity control. Temperature and humidity can be set independently. Four individual count-down timers for products with different time requirements.

HUMIDIFIER: Internally mounted, easy servicing. No flush cleaning required. Low maintenance spray flash system.

INSULATION: The proofer cabinet is rigid and formed of stainless steel panels with polyurethane foam insulation and sealed with gaskets to form a strong, energy efficient, tight and sanitary enclosure.

HARDWARE AND FITTINGS: Heavy-duty, plastic-coated door handles positioned horizontally.

NOTES:

- Door opening will accommodate 74" high racks.
- For proper installation, floor should be level within ⅛" per foot not to exceed ¾".
- Freight class 85.

DETAILS AND DIMENSIONS

PHYSICAL DATA	40.5" DEEP CABINET	60.5" DEEP CABINET	80.5" DEEP CABINET
Interior Dimensions	74.5" H x 37.75" D x 52.6" W	74.5" H x 57.75" D x 52.6" W	74.5" H x 77.75" D x 52.6" W
Exterior Dimensions	99.5" H x 43.25" D x 62" W	99.5" H x 63.25" D x 62" W	99.5" H x 83.25" D x 62" W
Rack Capacity	2 single end or 3 single side or 1 double side load	4 single end or 5 single side or 2 double side load	5 single end or 6 single side or 2 double side load
Net Door Opening Height	74.5"	74.5"	74.5"
Net Door Opening Width	51"	51"	51"
Number of Doors	2	2	2
Power Input (w/neutral)*	208-240V/50-60Hz/1 18.4-20.4 A 208-240V/50-60Hz/3 18.4-20.4 A	208-240V/50-60Hz/1 37.0-42.0 A 208-240V/50-60Hz/3 32.0-37.0 A	208-240V/50-60Hz/1 37.0-42.0 A 208-240V/50-60Hz/3 32.0-37.0 A

PHYSICAL DATA	100.5" DEEP CABINET	120.5" DEEP CABINET
Interior Dimensions	74.5" H x 97.75" D x 52.6" W	74.5" H x 117.75" D x 52.6" W
Exterior Dimensions	99.5" H x 103.25" D x 62" W	99.5" H x 123.25" D x 62" W
Rack Capacity	6 single end or 8 single side or 3 double side load	8 single end or 10 single side or 3 double side load
Net Door Opening Height	74.5"	74.5"
Net Door Opening Width	51"	51"
Number of Doors	2	2
Power Input (w/neutral)*	208-240V/50-60Hz/1 37.0-42.0 A 208-240V/50-60Hz/3 32.0-37.0 A	208-240V/50-60Hz/3 35.5-39.5 A

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.