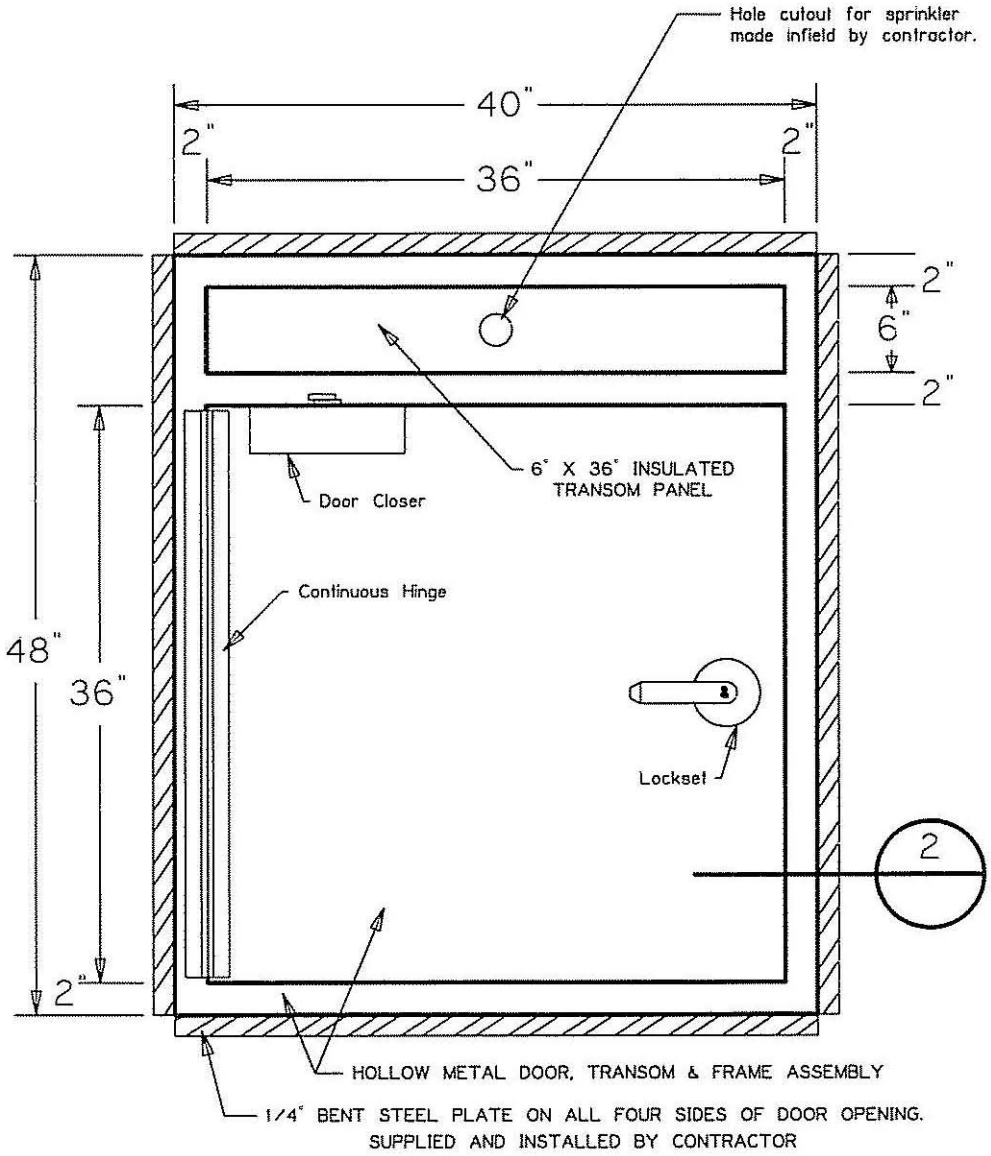

(1) FRONT ELEVATION

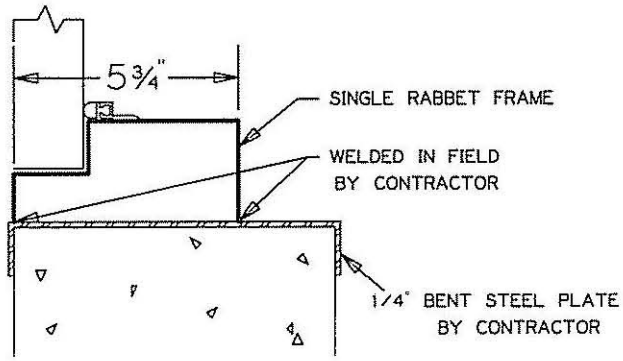

(2) SIDE ELEVATION

GENERAL INSTALLATION NOTES:

DOOR TO BE INSTALLED 3'-0" AFF IN RECESSED DOCK APPLICATIONS WHERE COMPACTOR IS INSTALLED PER ASD-114 & ASD-114A.

DOOR TO BE INSTALLED 4'-6" AFF IN SPECIAL APPLICATIONS WHERE COMPACTOR IS INSTALLED ON PAD ELEVATION THE SAME AS THE DOCK FLOOR ELEVATION. PROVIDE MINIMUM 5'-0" X 5'-0" PAD ELEVATED 21" AFF. WITH RAILING ON ALL SIDES.

SET DOOR & FRAME ASSEMBLY IN PLACE AND WELD DOOR FRAME TO BENT STEEL OPENING FRAME.

DOOR & FRAME ASSEMBLY CRITERIA:

1. COMPACTOR DOOR & FRAME ASSEMBLY
   DOOR - 3'-0" X 3'-0" X 1 3/4", 16 GAUGE GALVANIZED STEEL.
   FRAME - TRANSOM TYPE, 14 GAUGE STEEL, SINGLE RABBET JAMBS, HEAD & SILL.
   TRANSOM PANEL - INSULATED DOOR PANEL.
2. DOOR SHALL BE FLUSH WITH EDGE OF FRAME.
3. DOOR & FRAME ASSEMBLY TO BE SUPPLIED BY KROGER AND INSTALLED BY CONTRACTOR.

HARDWARE SPECIFICATIONS:

QTY	PRODUCT	MODEL	FINISH
1	Cont. Hinge	780-210 34.5"	AL
1	Exit Lockset	ND25x80BD RHO	626
1	Temp Core	80-035	GREEN
1	Closer	1261 REG/PA	AL
1	Weatherstrip	891S (2) 36" x (1) 84"	MIL

KROGER - COMPACTOR DOOR