

*HEAT SEAL INNOVATION – THE INDUSTRIES ONLY NSF CERTIFIED & ENERGY SMART OVERWRAPPER*

**FEATURES**

- Innovative Seal Plate Design with 10 Independent Heat Zones that Allow for Continued Use of Seal Plate in the Event of Damage Without Immediate Replacement
- Polyamide Film Wrap Seals and Protects Seal Plate from Moisture
- Photo Eye Detects All Tray Colors Consistently & Initiates Heating Cycle
- Dual LED Light Indicator Indicates Heating Status
- Energy Smart Microprocessor Reduces Power Consumption by 80%
- Local Utility Rebates may be Available



**MODEL SPECS**

<b>MODEL</b>	700ES - D
<b>FILM MOUNT</b>	Cradle System
<b>FILM CAPACITY</b>	20" Maximum Roll Width, 8" Maximum Roll Diameter
<b>SEAL PLATE</b>	6" x 15"
<b>OVERALL DIMENSIONS</b>	24.75" D, 23" W, 9" H (63 D, 59 W, 23 H cm)
<b>ELECTRICAL SPECIFICATIONS</b>	 120 Volt, 60Hz, 162 Watts
<b>SEAL PLATE TEMPERATURE</b>	Maximum Temperature 380°F
<b>WEIGHT</b>	28 lbs. (13kg)
<b>OTHER FEATURES</b>	No Assembly Required, Quick Film Changeover
<b>COMPARABLE TO</b>	600A



**SERIES D**


**OTHER FEATURES**

- Square Edged Hot Rod Cuts Film with Ease
- Circuit Breakers Allow for Fast, Easy Reset and Low Maintenance
- Rigid Aluminum and Stainless Steel Construction
- Supplied with a Replaceable Non-Stick Cover to Maintain a Hygienic Sealing Surface

**SERIES D REPLACEMENT PARTS**

**6" x 15" Control Board**  
(1818-037)

**Series D Seal Plate 6" x 15"**  
(6137-245)

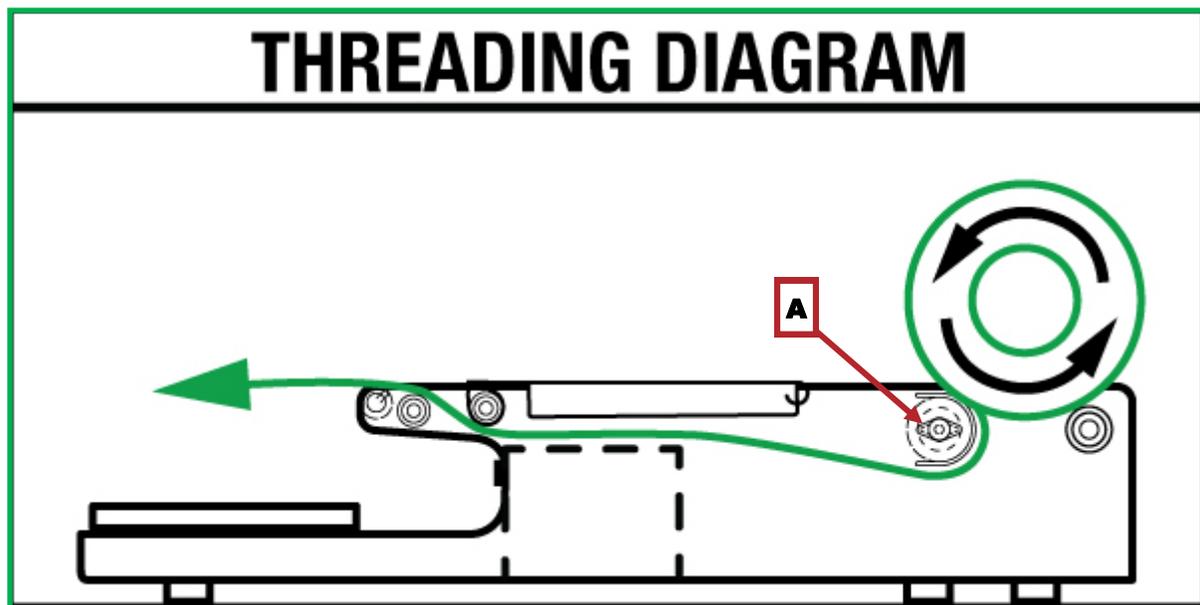

**FILM THREADING**

1. Facing the tension knob (A) side of the machine, the film should come off the roll counter-clockwise and **pass in-between the two rollers it sits on.**
2. Pull the film under the wrapping bridge and cut it with the hot rod.
3. The black tension knob (A) can be adjusted for proper tension on the film.

