


**GENERAL NOTES:**

- "---" indicates that the feature is not an option on this case model and/or the data is not yet available.



SHIPPING WEIGHT	
Case Length	Weight (lbs)
3' x 3'	177
4' x 4'	336
4' x 8'	684

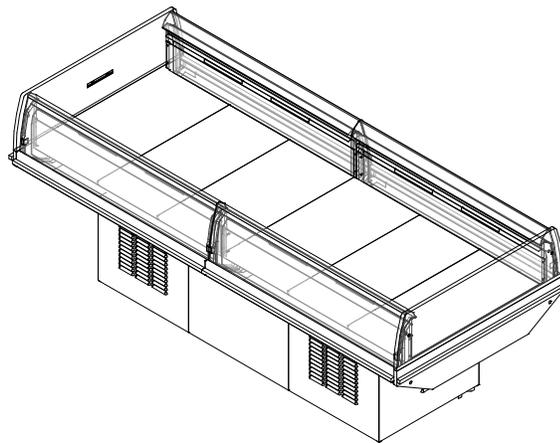

ENGINEERED FOR STORES WITH AMBIENT CONDITIONS NOT TO EXCEED 75° AND 55% RELATIVE HUMIDITY. DUE TO ENGINEERING IMPROVEMENTS SPECIFICATIONS MAY CHANGE WITHOUT NOTICE. ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS. NUMBERS ARE BASED ON STANDARD CASE SIZES. CONSULT ENGINEERING.

**MIDA**

Rev. Date	Rev. #	Rev. Title
3-9-20	0	NEW RELEASE

SYSTEM REQUIREMENTS						
Case Size	Volts	Phase	Electrical Circuits Per Case	Total Amps	MCA	MOP
3' x 3'	120	1	1	3.6	4.37	15A
4' x 4'	120	1	1	8.6	10.96	15A
4' x 8'	120	1	1	17.9	20.4	25A
4' x 8'	120	1	(2 (1 OF 2)*)	9.7	12.1	15A
4' x 8'	120	1	(2 (2 OF 2)*)	8.2	10.3	15A

ELECTRICAL DATA					
Case Size	Fans Per Case	High Efficiency Fans		Anti-Condensate Heat	
		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts
3' x 3'	1	0.02	3.0	0.40	48.0
4' x 4'	2	0.05	7.0	1.03	123.0
4' x 8'	4	0.10	14.0	2.05	246.0

GUIDELINES AND CONTROL SETTINGS				
Case Size	Case Application	24hr Energy Usage (kWh)	Discharge Air (°F)	Discharge Air Velocity (FPM)
3' x 3'	Deli	2.84	21	120
4' x 4'	Fresh Meat	14.61	7	120
4' x 8'	Fresh Meat	28.54	7	120

CONDENSING UNIT DATA						
Case Size	Volts	Phase	RLA (amps)	LRA (amps)	Refrigerant	Refrigerant Charge (lbs)
3' x 3'	120	1	4	23	R290	0.33
4' x 4'	120	1	10	44	R290	0.24
4' x 8'	120	1	20	88	R290	0.24

DEFROST CONTROLS					
Case Application	Case Size	Defrosts per Day	Run Off Time (Min)	Timed Off Defrost (Min)	Timed Off Defrost Termination Temp (°F)
Deli	3' x 3'	3	0	51	47
Fresh Meat	4' x 4'	4	0	23	68
Fresh Meat	4' x 8'	4	0	23	68

**NOTES:**

- "----" indicates that the feature is not an option on this case model and/or the data is not yet available.
- Notes added are specific to case as pertains to data.
- " \* " Indicates the MIDA 8 is supplied with 2 electrical plugs and may be connected to separate circuits with a 15A breaker, or a common circuit with a 25A breaker.




ENGINEERED FOR STORES WITH AMBIENT CONDITIONS NOT TO EXCEED 75° AND 55% RELATIVE HUMIDITY. DUE TO ENGINEERING IMPROVEMENTS SPECIFICATIONS MAY CHANGE WITHOUT NOTICE. ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS. NUMBERS ARE BASED ON STANDARD CASE SIZES. CONSULT ENGINEERING.


**MIDA**

Rev. Date	Rev. #	Rev. Title
3-9-20	0	NEW RELEASE







**(4'x4') & (4'x8') SECTION**




**(3'x3') SECTION**



**(4'x4') TOP VIEW**



**(3'x3') TOP VIEW**

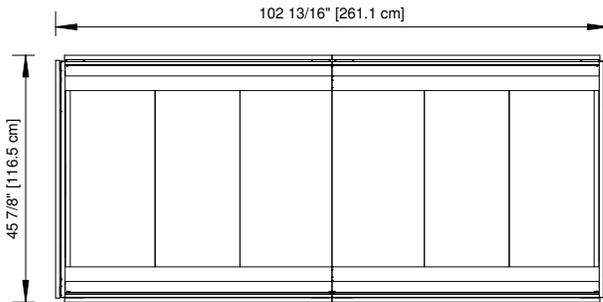

**(4'x8') TOP VIEW**

**NOTES:**

- "----" indicates that the feature is not an option on this case model and/or the data is not yet available.



ENGINEERED FOR STORES WITH AMBIENT CONDITIONS NOT TO EXCEED 75° AND 55% RELATIVE HUMIDITY. DUE TO ENGINEERING IMPROVEMENTS SPECIFICATIONS MAY CHANGE WITHOUT NOTICE. ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS. NUMBERS ARE BASED ON STANDARD CASE SIZES. CONSULT ENGINEERING.

**MIDA**

Rev. Date	Rev. #	Rev. Title
3-9-20	0	NEW RELEASE

**Hillphoenix**  
A DOVER COMPANY